




S SERIES ELEMENTS

PALL 9800/9801 INTERCHANGE

Media: Zinga Synthetic "Z-Glass" Media
 Application: S6000 Series High Pressure Filters
 Temperature: Nitrile Seals -45°F to +225°F
 Fluorocarbon Seals -20° F to +275° F

PRESSURE

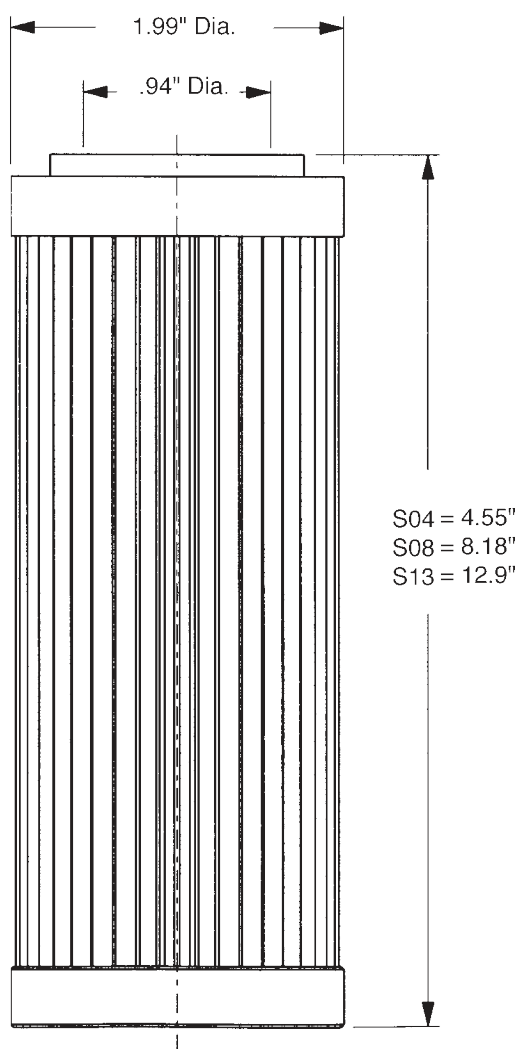

150 PSID RATED ELEMENTS

(For Use in Filters with Bypass Valve Only)

ZINGA P/N	Bx $\mu(c)$ = 200	Bx $\mu(c)$ = 1000	PALL P/N
S0406LN	5 Micron	6 Micron	HC9804FDN4H
S0410LN	8 Micron	10 Micron	HC9804FDS4H
S0420LN	19 Micron	23 Micron	HC9804FDT4H
S0803LN	<4 Micron	<4 Micron	HC9804FDP8H
S0806LN	5 Micron	6 Micron	HC9804FDN8H
S0810LN	8 Micron	10 Micron	HC9804FDS8H
S0820LN	19 Micron	23 Micron	HC9804FDT8H
S1303LN	<4 Micron	<4 Micron	HC9804FUP13H
S1306LN	5 Micron	6 Micron	HC9804FUN13H
S1310LN	8 Micron	10 Micron	HC9804FUS13H
S13020LN	19 Micron	23 Micron	HC9804FUT13H

Buna-N Seals Standard. Replace "N" in P/N with "V" for Fluorocarbon.


3000 PSID RATED ELEMENTS

ZINGA P/N	Bx $\mu(c)$ = 200	Bx $\mu(c)$ = 1000	PALL P/N
S0403HN	<4 Micron	<4 Micron	HC9801FUP4H
S0410HN	8 Micron	10 Micron	HC9801FUS4H
S0803HN	<4 Micron	<4 Micron	HC9801FUP8H
S0810HN	8 Micron	10 Micron	HC9801FUS8H
S1303HN	<4 Micron	<4 Micron	HC9801FUP13H
S1310HN	8 Micron	10 Micron	HC9801FUS13H


Buna-N Seals Standard. Replace "N" in P/N with "V" for Fluorocarbon.

S SERIES ELEMENTS


Fluid Viscosity 150 SUS at 100°F (32 CS at 40°C)

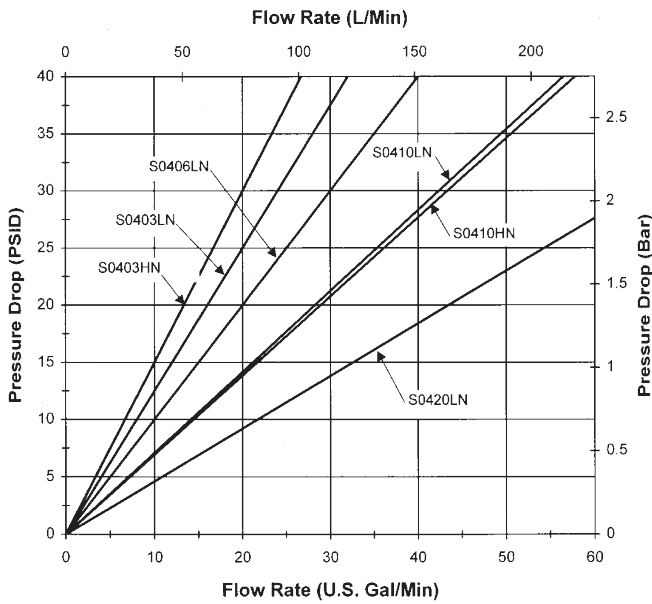

S04 Series

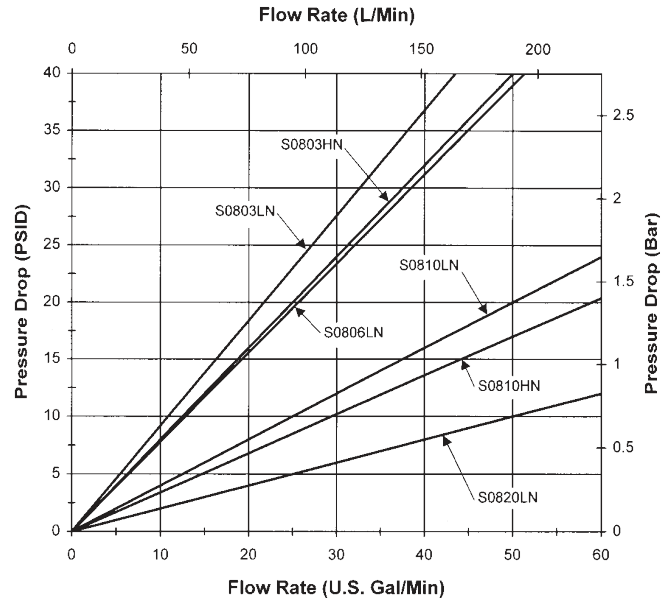

S08 Series

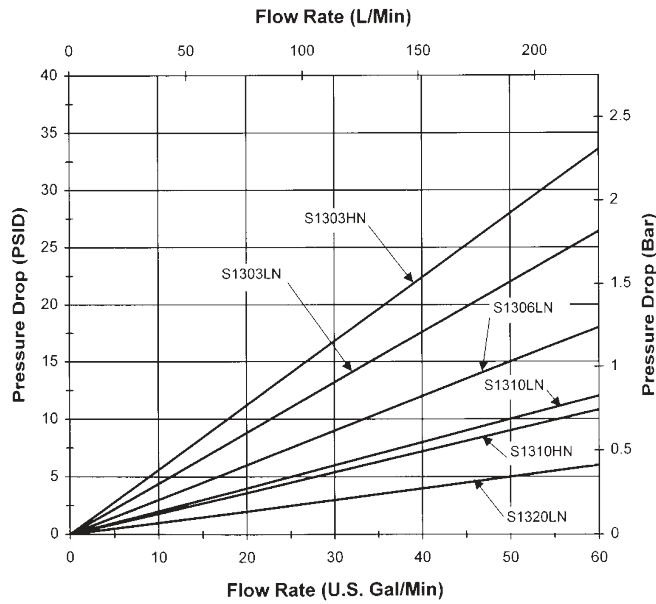

PRESSURE